

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ (X) Utility ☐ () Design
☒ (X) original patent application,
☐ () continuation-in-part application

INVENTOR(S): Jeffrey A. Morgan, et al.

TITLE: A System for Providing Internet-Related Services to Handheld Devices

Enclosed are:

- ☒ (X) The Declaration and Power of Attorney. ☒ (X) signed ☐ () unsigned or partially signed
☒ (X) 6 sheets of drawings (one set) ☐ () Associate Power of Attorney
☐ () Form PTO-1449 ☐ () Information Disclosure Statement and Form PTO-1449
☐ () Priority document(s) ☐ () Other (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	18 — 20	0	X \$18	\$ 0
INDEPENDENT CLAIMS	2 — 3	0	X \$78	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$260	\$ 0
BASIC FEE: Design \$310.00 ; Utility \$890.00				\$ 690
TOTAL FILING FEE				\$ 690
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 690

Charge \$ 690 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL 187 272 033 US

Date of Deposit 1/25/00

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By Ellen Gachera
Typed Name: Ellen Gachera

Respectfully submitted,

Jeffrey A. Morgan, et al.

By Thomas X. Li

Thomas X. Li

Attorney/Agent for Applicant(s)

Reg. No. 37,079

Date: 1/25/00

Telephone No.: (650) 857-5972

UNITED STATES PATENT APPLICATION

FOR

A SYSTEM FOR PROVIDING INTERNET-RELATED
SERVICES TO HANDHELD DEVICES

INVENTORS:

Jeffrey A. Morgan

Bill Serra

John C Schettino, Jr.

Prepared by:

Thomas X. Li (Reg. No. 37,079)
Hewlett-Packard Company
Intellectual Property Administration
P.O. Box 272400
Mail Stop 35
Fort Collins, CO 80527-2400
(650) 857-5972
thomas_li@hp.com

Attorney's Docket No. 10992213-1

"Express Mail" mailing label number: EL 187 272 033 US

Date of deposit: 1/25/00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and is addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231.


(Ellen Gachesa)

A SYSTEM FOR PROVIDING INTERNET-RELATED SERVICES TO HANDHELD DEVICES

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention pertains to the Internet and World Wide Webs. More particularly, this invention relates to a system for providing Internet-related services to mobile handheld devices.

2. Description of the Related Art

As is known, the Internet typically refers to a number of data service systems connected together via a high speed interconnect network. Each data service system typically includes web servers that host contents for various customers. The web servers can also host applications. Each of the data service systems is typically implemented by a computer system (e.g., a server computer system). A number of remote user terminals may be connected to a data service system via an interconnect network (e.g., a telephone network). This allows users at the user terminals to access the contents hosted in various data service systems. Each user terminal is typically implemented by a computer system (e.g., a personal computer) and is equipped with a web browser that allows the user terminal to access the contents and/or applications hosted in various data service systems.

Such a prior art scheme, however, bears disadvantages. One disadvantage is that the scheme requires the use of the user terminal for a user to access contents hosted in the Internet. If a user wants to access the Internet at a

particular place, the user must have a user terminal at that place. Without the user terminal, no Internet access can be offered to the user.

Another disadvantage is that the scheme lacks flexibility, mobility, and convenience for a user to access the Internet. As is known, the user terminal is typically a personal computer. Although the personal computer can be made small and portable (e.g., a notebook computer), it is still inconvenient for the user to carry the machine around. Further miniaturization of the computer (e.g., palm-top personal organizer) typically takes away some important components (e.g., floppy drive) of the machine, and/or makes the machine not user friendly (e.g., shrinking the display or keyboard so it is really uncomfortable for the user to use the machine). Physical constraints may also limit or prevent further miniaturization.

Moreover, peripheral devices (e.g., printers, scanners, or and projectors) are typically left behind when a user carries a computer around. When the user uses the computer as a user terminal to access the Internet and wants to print or projects a particular content, the user must also carry the peripheral devices along with the computer. For example, if the user anticipates the use of a printer and a projector at a remote location, the user must carry both along with the computer. This adds inconvenience to the user and restricts mobility of the user terminal. If the user connects the computer to a borrowed projector or printer, the user has to make sure that the computer has the appropriate software for the projector or appropriate printer driver software to drive the borrowed printer.

In addition, the place must be equipped with network connection so that the user can connect the user terminal to the network. This causes the scheme to lack flexibility. For example, if the interconnect network is the telephone

network, the user must find the telephone socket to connect the user terminal to the network. Further, the user terminal must be equipped with the appropriate kind of network capability. For example, if the user terminal is connected with a telephone network, the user terminal must be equipped with a modem. A user terminal without a modem cannot function when connected to a telephone network. If the user terminal is connected with a LAN (local area network) network, the user terminal must be equipped with a LAN card. A user terminal without a LAN card cannot function when connected to a LAN network.

Thus, there exists a need for an arrangement that allows a user to access the Internet everywhere without carrying the computer user terminal and its peripheral devices.

SUMMARY OF THE INVENTION

One feature of the present invention is to allow handheld devices not equipped with Internet access functions to access Internet.

5 Another feature of the present invention is to provide mobile Internet access function for handheld devices while not requiring the handheld devices to be Internet-enabled.

A further feature of the present invention is to allow the user of a mobile and simple handheld device to receive Internet-related and high quality output services that cannot be provided by the handheld device.

10 A system for providing Internet-related services to a handheld device is described. The system includes a client module embedded in the handheld device to enable the handheld device to send a Universal Resource Locator (URL) via a communication link. The URL indicates a desired web page at a remote web server. The system also includes a receiver that receives the URL sent from the handheld device via the communication link. A web access module is coupled to the receiver and external Internet to access and retrieve the desired web page from the remote web server via the external Internet. A render system is coupled to the web access module to render the retrieved web page to the user of the handheld device.

15 A system for providing Internet-related services to a handheld device is also described. The system includes a receiver that receives a Universal Resource Locator (URL) from the handheld device via a communication link. The URL indicates a desired web page. A web access module is coupled to the receiver and external Internet to access and retrieve the desired web page from a

remote web server via the external Internet. A render system is coupled to the web access module to render the retrieved web page to the user of the handheld device. The receiver, the web access module, and the render system all physically reside within the system while the handheld device is physically separated from the system.

Other features and advantages of the present invention will become apparent from the following detailed description, taken in conjunction with the accompanying drawings, illustrating by way of example the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows an Internet-based data access network system that
5 implements one embodiment of the present invention, wherein the network
system includes a gateway system and a client device with a client program.

Figure 2 shows in flow chart diagram form the process of the client
program.

Figure 3 shows in flow chart diagram form the process of the receiver
10 inside the gateway system.

Figure 4 shows in flow chart diagram form the process of the web access
module inside the gateway system.

Figure 5 shows one specific embodiment of the client device of Figure 1.

Figure 6 shows one specific embodiment of the rendering module of
15 Figure 1.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 shows an Internet-based data access network system 10 that includes a gateway system 20 and a client device 11 (having a client program 12) that together implement one embodiment of the present invention. In addition to the gateway system 20 and the client device 11, the data access network system 10 includes the Internet 17 and a web content server 19.

In one embodiment, the data access network system 10 is an Internet network system. In another embodiment, the data access network system 10 is an Intranet network system. In a further embodiment, the data access network system 10 is a combination of Internet and Intranet network systems. An open standard communication protocol is used for communications within the data access network system 10. In one embodiment, the open standard communication protocol is the Hyper Text Transport Protocol (HTTP).

Briefly, the client device 11 is a handheld device that stores Universal Resource Locators (URLs) for information and/or services the user of the client device 11 commonly or frequently accesses. The gateway system 20 provides Internet-related services and high quality output services to the client device 11. This means that the client device 11 can be made small and easy to carry while still offering its user Internet related services and high quality output services wherever the user is (i.e., through the gateway system 20).

As will be described in more detail later, the gateway system 20 is connected to the Internet 17. The gateway system 20 includes a receiver 21 that receives URLs from the client device 11 via a wireless communication link. The gateway system 20 also includes a web access module 22 that allows the

gateway system 20 to access contents hosted in the content server 19 (or other servers of the Internet 17) based on the URLs sent from the client device 11. The web access module 22 is connected to the Internet 17 that is external to the gateway system 20. The gateway system 20 also includes a rendering module 23 that renders (e.g., prints, displays, plays, or projects) the retrieved contents to the user of the client device 11.

In this arrangement, the client device 11 does not need a web browser. This means that the client device 11 does not need to be equipped with Internet accessing functionality and is not required to attach to a network. The gateway system 20 provides the Internet access function to the client device 11. The user of the client device 11 only needs to store on the client device 11 the URLs of the desired content/service sites. The gateway system 20, having received the selected URL from the client device 11, retrieves the content/service in accordance with the URL and renders the content/service using its rendering module 23. Like a payphone, the gateway system 20 can be placed in various public or private locations (e.g., conference or meeting rooms, hotel rooms, hotel lobbies, airports, bus or train terminals, shopping centers, etc).

In addition, the gateway system 20 allows the client device 11 to be made very small and only have limited storage, processing, and display capabilities while allowing the user of the client device 11 to still be able to access rich information of the contents hosted on the Internet 17 or the content server 19. Moreover, the gateway system 20 allows the user of the client device 11 to receive high quality output services such as printing, projecting, and displaying for the retrieved contents without carrying any peripheral output device. The gateway system 20 and the client device 11 will be described in more detail

below, also in accordance with Figures 1-6.

Referring to Figure 1, the remote web content server 19 is connected to the Internet 17. The web content server 19 may be located within one data service system or formed by a number of data service systems connected together. Figure 1 only shows one such server for illustration purposes. In practice, many more servers may be included in the data access network system 10. The server 19 can be implemented by any known means.

In addition, the web content server 19 is not limited to just web server. The server 19 may be any kind of content server. For example, the server 19 may be a news server, an e-mail server, an application server, or an e-commerce server.

The content server 19 is connected to the gateway system 20 via Internet 17. The Internet 17 is formed by connecting a number of data service systems together via high speed and high bandwidth networks. The Internet 17 is known in the art.

The content server 19 hosts contents that can be accessed by any source external to the content server 19. This means user terminals connected to the data service systems within the Internet 17 can access the contents hosted in the content server 19. The above described open standard communication protocol is used for communications through the Internet 17. This also means that the gateway system 20 can access the contents hosted in the content server 19 via the Internet 17.

In one embodiment, the gateway system 20 is a stationary system. This means that the gateway system 20 is fixed at the location where it is placed. In another embodiment, the gateway system 20 is portable. In addition, the

gateway system 20 has all of its components located in a single enclosure. Alternatively, the components/modules of the gateway system 20 can be separately implemented in various systems.

5 The client device 11 is a portable handheld electronic device that is relatively very easy to carry. In one embodiment, the client device 11 is a pager or a watch. In another embodiment, the client device 11 is a cellular phone or wireless satellite phone. In a further embodiment, the client device 11 is a palm-top computer system or personal organizer. The client device 11 can be any kind of information appliance. Alternatively, the client device 11 can be
10 any kind of small and portable handheld electronic device or appliance with limited processing, storage, and display resources.

The client device 11 does not require Internet access function. This means that the client device 11 does not require a Web Browser software and Internet-related network access module. However, this does not mean that the
15 client device 11 must not have Internet access function. The client device 11 may nonetheless be equipped with the Internet access function although such function is not required for the client device 11. For example, when the client device 11 is a pager, cellular phone, or personal organizer (e.g., Jornada personal organizer available from Hewlett-Packard Company of Palo Alto,
20 California), the client device 11 may have Internet access through the device's wireless communication channel.

The client device 11 has a local communication module (not shown) for communications with the gateway system 20. The communication module of the client device 11 allows the client device 11 to transfer data to the external
25 gateway system 20 via a wireless communication link or channel 15 using a

simple and open standard communication protocol (e.g., the protocol used in remote controls). The protocol is simple because it only needs to handle sending a few bytes of data.

5 In one embodiment, the communication link 15 employs radio frequency communication. In another embodiment, the communication link 15 is an infrared communication link. In a further embodiment, the communication link 15 is a laser communication link. Alternatively, other wireless or wire communication means may be used to allow the client device 11 to transfer data to the gateway system 20.

10 In one embodiment, the communication module of the client device 11 only transfers data to the gateway system 20 and does not receive any data from the gateway system 20. This allows the communication module of the client device 11 to be simple. Alternatively, the communication module of the client device 11 can transfer data to and receive data from the gateway system 20.
15 The communication module of the client device 11 can be implemented using any known means.

20 The client device 11 also includes a storage module (also not shown in Figure 1) that stores a number of URLs selected by the user of the client device 11. This means that the user of the client device 11 can store URLs for information or services accessed by the user on the Internet in the storage module of the client device 11. The storage module of the client device 11 can also receive URLs from external devices (not shown). These URLs may refer to information or services providing news, appointments, e-mails, stock market quotes, e-commerce. The URLs may also refer to corporate information such as
25 brochures, presentations, contracts, etc.

The storage module can be a volatile or non-volatile storage means. The stored URLs can be inputted by the user into the client device 11 manually, or transmitted to the client device 11 electronically. In addition, if the client device 11 has web or Internet access function, the URLs can be embedded in a hyperlink text of a web page displayed on the client device 11.

The client device 11 includes a client program 12. In one embodiment, the client program 12 is a software embedded in the client device 11. In another embodiment, the client program 12 is implemented by firmware. The client program 12 may also be implemented by hardware.

The client program 12 is used to cause the communication module of the client device 11 to send a selected URL to the gateway system 20. The selected URL can be the standard URL address or embedded in a hyperlink. The user of the client device 11 selects the selected URL and then clicks on an activation icon to trigger the client program 12 to cause the selected URL to be sent to the gateway system 20.

During operation, the user of the client device 11 first selects one of the URLs stored or received in the client device 11 through the user interface (also not shown in Figure 1) of the client device 11. As described above, URLs can be in the actual URL form (e.g., "www.hp.com") or embedded in hyperlinks. In addition, the URLs can be stored as bookmarks. The user of the client device 11 first selects the selected URL. The user then activates the client program 12. This is done by clicking on an activation icon of the client device 11, or an activation button of the client device 11. The activation then causes the client program 12 to cause the communication module of the client device 11 to send the selected URL to the receiver 21 of the gateway system 20. Figure 2 shows

in flow chart diagram form the process of the client program 12, which will be described in more detail below.

As can be seen from Figure 2, the process starts at the step 30. At the steps 31 and 32, the client program 12 waits to receive the URL selected by the user of the client device 11. As the step 33, the received URL is displayed on the client device 11 and acknowledged by the client program 12. At the step 34, the client program 12 causes the communication module of the client device 11 to establish communication link between the client device 11 and the gateway system 20. The communication occurs when the user requests it. As can be seen from Figure 2, the communication link is established with the receiver 21 of the gateway system 20. As also be described above, the communication link is, for example, a wireless communication link. Then the client program 12 sends the received URL to the gateway system 20 via the established communication link at the step 35.

In one embodiment, the client program 12 includes means for providing security support to the URLs sent to the gateway system 20. In this case, the client program 12 may embed a simple password protection into the transferred URLs. If the URL addresses a restricted site that requires user ID and password, the client program 12 may send in the next transmission the user ID and password. Alternatively, the user can manually enter the user ID and password directly through the gateway system 20. In another embodiment, the client program 12 has an encryption mechanism that encrypts the URL transferred.

At the step 36, the client program 12 closes the established communication link. The process then ends at the step 37.

Figure 5 shows one specific embodiments of the client device 11 of Figure 1. Figure 5 shows that the client device 11 of Figure 1 is implemented by an Internet-enabled personal organizer 51. The organizer 51 receives web contents via its networking function (including the antenna 55). The web contents may include desired URLs for the user of the organizer 51. The organizer 51 also includes a display screen 54 that displays the retrieved web contents. The organizer 51 also includes a user interface function (i.e., the control icons 53 and control buttons 52 that allow the user of the device 51 to select a URL and to send the selected URL to the gateway system 20 of Figure 1. Alternatively, the organizer 51 may be a pager that does not support Internet access function. In this case, the URL information can be received by the pager and displayed on the display screen or window of the pager for the user to select.

Referring back to Figure 1, the structure and operation of the gateway system 20 is now described. As described above, the gateway system 20 includes the receiver 21, the web access module 22, and the device-specific rendering module 23. The receiver 21 is used to establish communication link with the client device 11 and to receive URLs transferred from the client device 11. The receiver 21 can be maintained at receiving mode all the time or can be activated by the user of the client device 11 (e.g., after the user pays the required fee). The receiver 21 can be implemented using any known local communication technology. For example, if the communication link 15 employs radio communication, the receiver 21 is a radio receiver circuit. If the communication link 15 is an infrared communication link, then the receiver 21 is an infrared receiver circuit. If the communication link 15 is a laser

communication link, the receiver 21 is a laser receiver circuit. The receiver 21 may also include a decryption function to decipher any encrypted transmission from the client device 11. Figure 3 shows the flowchart of the process of the receiver 21 in receiving the URLs transferred from the client device 11.

5 In Figure 3, the process starts at the step 40. At the steps 41 and 42, the receiver 21 tries to detect communication signal from the client device 11 to establish the communication link with the client device 11. At the step 43, the receiver 21 receives the transferred URL from the client device 11. In one embodiment, the receiver 21 also has encryption and decryption support such that if the transferred URL is encrypted, the receiver 21 can decrypt the URL. At the step 44, the receiver 21 sends the received URL to the web access module 22. The process then ends at the step 45.

15 Referring back to Figure 1, the web access module 22 receives transferred URLs from the receiver 21. The web access module 22 then accesses the Internet 17 or the content server 19 via the Internet 17. In one embodiment, the web access module 22 receives one URL from the receiver 21 and then retrieves the corresponding content from a remote content server specified by the URL. Then the web access module 22 receives a next URL from the receiver 21. In another embodiment, the web access module 22 keeps receiving URLs transferred to the receiver 21 without interrupting its current web accessing operation. The web access module 22 is essentially a web browser without the rendering function. The rendering function is implemented by the device-specific rendering module 23. This means that the rendering of the retrieved contents specified by the URLs from the receiver 21 depends on the type and function of the rendering module 23. If the rendering module 23 is a printer

system, then the rendering function is to print the content out. If the rendering module 23 is a display system, then the rendering function is to render the content on the display screen.

5 The web access module 22 can be implemented using any known web browser technology (e.g., Microsoft's Internet Explorer or Netscape's Communicator). Figure 4 shows in flowchart diagram form the operation of the web access module 22, which will be described in more detail below.

10 In Figure 4, the process of the web access module 22 starts at the step 50. At the step 51, the web access module 22 (Figure 1) receives the URL from the receiver 21. The web access module 22 then fetches the requested content in from the corresponding remote content server (or the content server 19) specified by the URL via the Internet 17 at the step 52. At the step 53, the web access module 22 sends the retrieved content to the rendering module 23 of the gateway system 20 for high quality rendering.

15 Referring to Figure 1, once the web access module 22 retrieves the content from a remote content server via the Internet 17 specified by the URL received from the receiver 21, web access module 22 sends the retrieved content to the rendering module 23. The rendering module 23 then renders (e.g., displays or prints) the retrieved content so the user of the client device 11 can view the content.

20 In one embodiment, the device-specific rendering module 23 is a printer system. In another embodiment, the rendering module 23 is a display system. In a yet another embodiment, the rendering module 23 is a video or audio (e.g., music) player system. In a further embodiment, the rendering module 23 is a projection system. Alternatively, the rendering module 23 can be other types of

output device or system.

Thus, the rendering function of the gateway system 20 is device-specific and depends on the type of output device the rendering module 23 employs. This means that the rendering function of the gateway system 20 is also device-specific and depends on the type of device implemented for the rendering module 23. For example, if the rendering module 23 is a printer system, then the rendering function of the gateway system 20 is to print the retrieved content. If the rendering module 23 is a display system, then the rendering function of the gateway system 20 is to render the retrieved content on the display screen of the rendering module 23. If the rendering module 23 is a display system with a user interface, the user of the client device 11 can. If the rendering module 23 is a display system with a user interface, the user of the client device 11 can also browse the Internet 17 from the rendering module 23.

Figure 6 shows one specific embodiment of the rendering module 23 of Figure 1. As can be seen from Figure 6, the printer system 83 implements the rendering module 23 of Figure 1, and is connected to the web access module 82 to print out the retrieved content by the web access module 82. The printer system 83 can be any known printer. For example, the printer system 83 can be a high speed high quality printer. As an another example, the printer system 83 can be a large printer system capable of printing color photographs. In addition and as described above, the printer system 83 can be replaced with other output or display systems. For example, the printer system 83 can be replaced with a projector, a large screen display, or a video/audio player.

In the foregoing specification, the invention has been described with reference to specific embodiments thereof. It will, however, be evident to those

skilled in the art that various modifications and changes may be made thereto without departing from the broader spirit and scope of the invention. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

CLAIMS

What is claimed is:

1. A system for providing Internet-related services to a handheld device, comprising:

a client module embedded in the handheld device to enable the handheld device to send a Universal Resource Locator (URL) via a communication link, wherein the URL indicates a desired web page;

a receiver that receives the URL sent from the handheld device via the communication link;

a web access module coupled to the receiver and external Internet to access and retrieve the desired web page from a remote web server via the external Internet;

a render system coupled to the web access module to render the retrieved web page to the user of the handheld device.

2. The system of claim 1, wherein the handheld device fits into a user's palm.

3. The system of claim 1, further comprising a memory in the handheld device that stores the URL.

4. The system of claim 1, further comprising a communication module in the handheld device that receives the URL from a remote site via an external network coupled to the communication module.

5. The system of claim 4, wherein the external network is a wireless network.

6. The system of claim 1, wherein the handheld device can be selected from a group comprising a pager, a cellular phone, a personal organizer, a watch, a palm pilot device, and an information appliance.

7. The system of claim 1, wherein the receiver, the web access module, and the render system all physically reside within a single enclosure separate from the handheld device.

8. The system of claim 1, wherein the communication link is a wireless communication link.

9. The system of claim 8, wherein the wireless communication link is one of an infra-red communication link, a radio frequency communication link, a microwave communication link, and a laser communication link.

10. The system of claim 1, wherein the web access module communicates with the remote web server via the Internet using an open standard communication protocol.

11. The system of claim 10, wherein the open standard communication protocol is a Hyper Text Transport Protocol (HTTP).

12. The system of claim 1, wherein the render system is one of a printer system, a display system, a projection display system, a user interface display system, an audio/video player system, a Web television system, and a combination thereof.

13. A system for providing Internet-related services to a handheld device, comprising:

a receiver that receives a Universal Resource Locator (URL) from the handheld device via a communication link, wherein the URL indicates a desired web page;

a web access module coupled to the receiver and external Internet to access and retrieve the desired web page from a remote web server via the external Internet;

a render system coupled to the web access module to render the retrieved web page to the user of the handheld device, wherein the receiver, the web access module, and the render system all physically reside within the system while the handheld device is physically separated from the system.

14. The system of claim 13, wherein the render system is one of a printer system, a display system, an information appliance, a projection display system, a user interface display system, an audio/video player system, a Web television system, and a combination thereof.

15. The system of claim 13, wherein the web access module communicates with the remote web server via the Internet using an open

standard communication protocol.

16. The system of claim 15, wherein the open standard communication protocol is a Hyper Text Transport Protocol (HTTP).

17. The system of claim 13, wherein the communication link is a wireless communication link.

18. The system of claim 17, wherein the wireless communication link is one of an infra-red communication link, a radio frequency communication link, a microwave communication link, and a laser communication link.

ABSTRACT

A system for providing Internet-related services to a handheld device is described. The system includes a client module embedded in the handheld device to enable the handheld device to send a Universal Resource Locator (URL) via a communication link. The URL indicates a desired web page. The system also includes a receiver that receives the URL sent from the handheld device via the communication link. A web access module is coupled to the receiver and external Internet to access and retrieve the desired web page from a remote web server via the external Internet. A render system is coupled to the web access module to render the retrieved web page to the user of the handheld device.

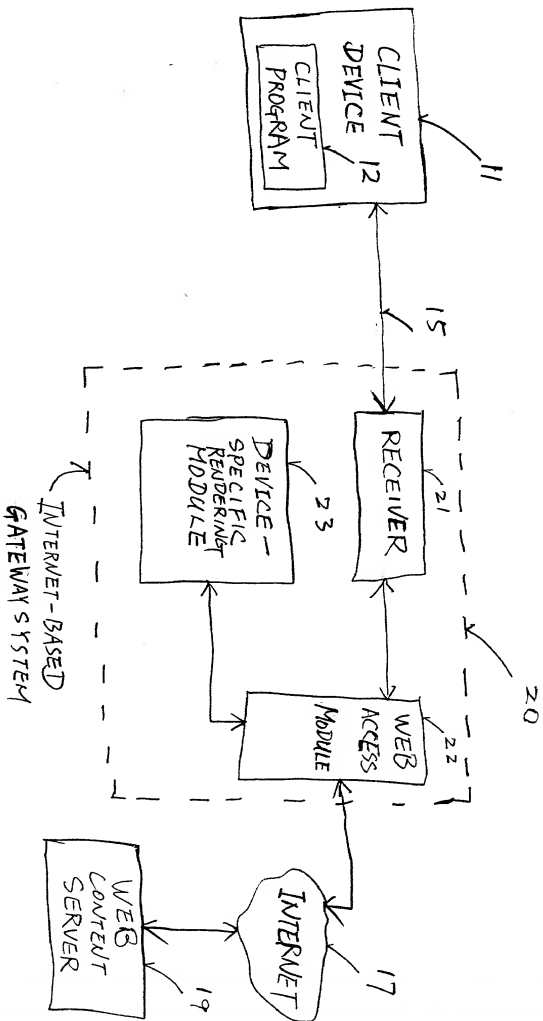


FIGURE 1

CLIENT PROGRAM

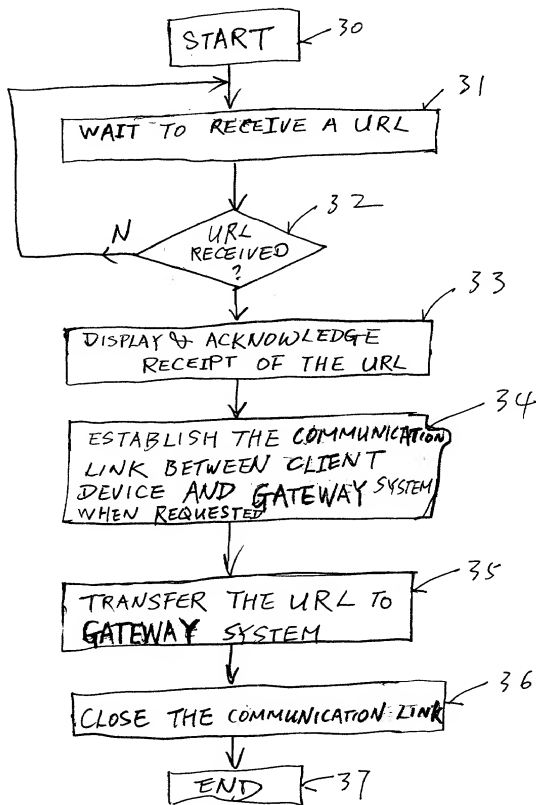


FIGURE 2

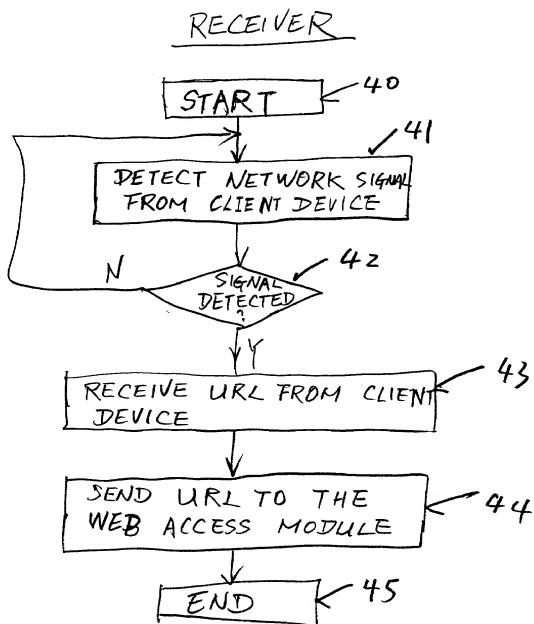


FIGURE 3

WEB ACCESS MODULE

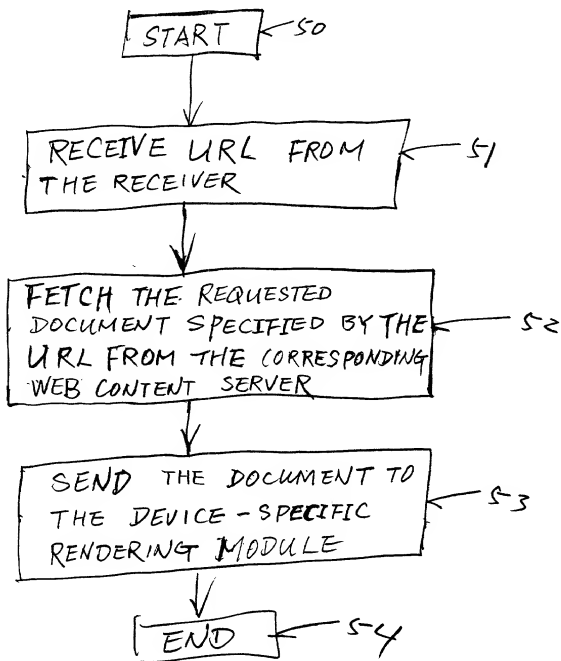


FIGURE 4


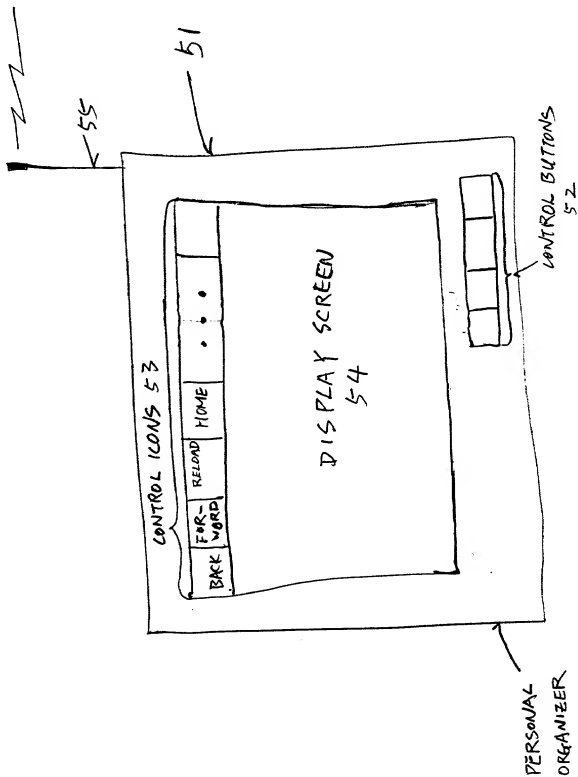


FIGURE 5.

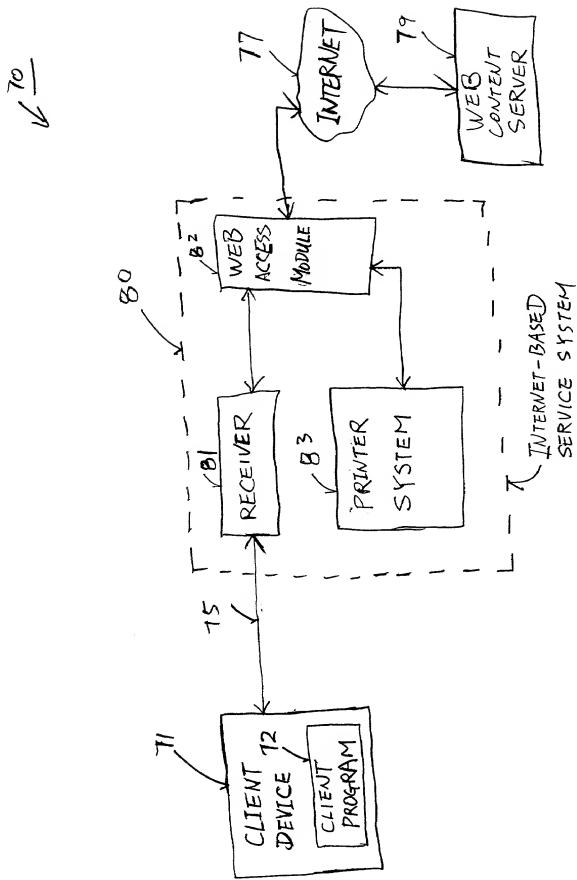

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATIONATTORNEY DOCKET NO. 10992213-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A System for Providing Internet-Related Services to Handheld Devices

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number 022879Place Customer
Number Bar Code
Label hereSend Correspondence to:
HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80528-9599**Direct Telephone Calls To:**Thomas X. Li
(650) 857-5972

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Jeffrey A. MorganCitizenship: USA UK JAMResidence: 1401 Aster Lane, Cupertino, California 95014Post Office Address: sameInventor's Signature [Signature]Date 1/25/00

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION (continued)

ATTORNEY DOCKET NO. 10992213-1

Full Name of # 2 joint inventor: Bill Serra Citizenship: USA

Residence: 4043 Park Blvd., Palo Alto, California 940306

Post Office Address: _____

Inventor's Signature Bill Serra Date Jan 25 / 1999 ^{SS} 2000

Full Name of # 3 joint inventor: John C. Schettino, Jr. Citizenship: USA

Residence: 4689 Cherrywood Drive, San Jose, California 95129

Post Office Address: _____

Inventor's Signature John C. Schettino Jr. Date 1/25/2000

Full Name of # 4 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____

Full Name of # 5 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____

Full Name of # 6 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____

Full Name of # 7 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____

Full Name of # 8 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____